

VIRTUAL MODEL AND SIMULATION FOR A NEW TYPE OF MACHINE TOOLS

Cornel BRISAN*, Manfred HILLER**

**University of Cluj-Napoca
C.Daicoviciu, 13, Cluj-Napoca, Romania
Tel: +40-264-593333, fax: +40-264-593333
cornelbrisan@yahoo.com*

***Duisburg – Essen University
Lotharstrasse 1, Duisburg, Germany*

Abstract: This paper presents two important issues in relation to new machine tools with parallel reconfigurable topology, namely, modular design and computation of kinematics if the manufacturing and assembly errors are taken into consideration. Thus, the kinematics for a version of this new type of machine tools was solved. Also, a simulation model, using MOBILE software package was developed.

Key words: Machine tools, parallel kinematics, modularity.

1. INTRODUCTION

A good dynamic behavior (high stiffness), a high accuracy and a good ratio between total mass and manipulated mass are just few advantages of parallel robots compared with serial type [1]. However, the design, the trajectory planning and application development of the parallel robots are difficult and tedious because the closed-loop mechanism leads to complex kinematics. To overcome this drawback, modular design concept is introduced in the development of parallel robots [6], [7]. Also, during the last period a new type of applications were developed. These new applications are related to the machine tools with parallel topology. Utilization of parallel topology in the machine tools field creates the possibility for a reconfigurable design, which is still an open problem and lacks theoretical base. One of the problems for reconfigurable robots is to determine the topology and geometry of the robot, which is suitable to fulfill a set of criteria. In the following sections, we first present a modular topologic synthesis, which leads to a new type of machine tools with parallel topology (named HyMaTo – Hybrid Machine Tools). Then, a method, which gives the possibility to consider the manufacturing and assembly error into the mathematic model of HyMaTo, is presented. Finally, a simulation model and numerical results is presented.

2. MODULAR TOPOLOGIC SYNTHESIS

The topologic synthesis of parallel mechanisms could be made if the relation of the number of degrees of freedom is considered [2], [3]:

$$M = (6 - m) \cdot n - \sum_{k=1}^5 (k - m) \cdot C_k - M_P \quad (1)$$

where m is the number of common restrictions for all elements, n is the number of the mobile elements, k is the number of restrictions which define a joint (for example in the case of prismatic joint $k = 5$), C_k is the number of joints with $(6 - k)$ degrees of freedom and M_P is the number of identical degrees of freedom. Let N be the number of mobile platforms and D_k – the number of joints with $(6 - k)$ degrees of freedom which directly connect the platforms of the mechanism.

With these notations, it results that the integer solutions of the equations:

$$M - 6 \cdot N + \sum_{k=1}^5 k \cdot (C_k + D_k) = 0 \quad (2)$$

gives all variants of parallel mechanisms with assumed hypothesis

According to other criteria such as additional geometric criteria or the number of the joints, which are directly connected to the base frame, the relation (5) can describe few topologic variants. Thus, figure 1 presents two of these possibilities. It is possible to observe that each of these variants has decoupled movements for position and orientation respectively. Thus, first variant has allocated for pure position first three degrees of freedom and the last three for pure orientation. This can be an important advantage related to the machine tools field of applications. Let HyMaTo1 be the name of the first variant (Fig. 1a).

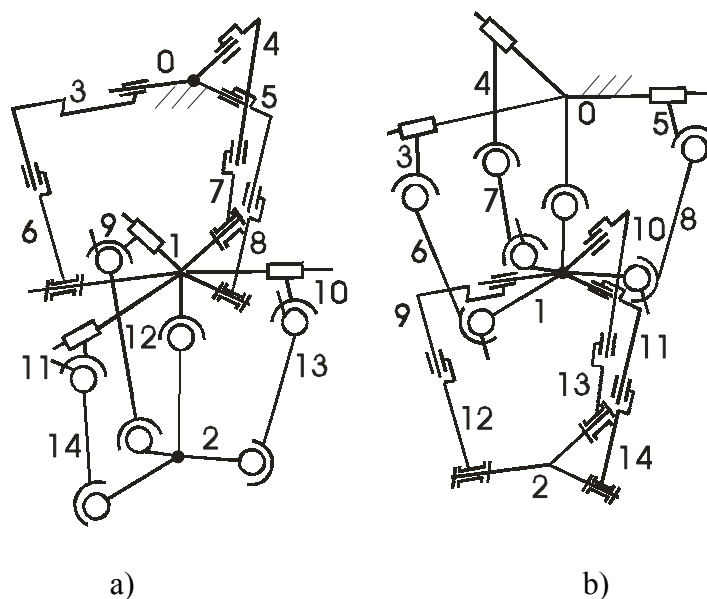


Figure 1. Variants of the HyMaTo with 6 dof

3. MANUFACTURING GEOMETRICAL ERRORS

In the beginning, we assume: a) the universal joints are made as the cardanic variant, b) a spherical joint is obtained from a serial connection of a rotational joint and a universal joint. Let there be a universal joint without geometrical errors (Fig. 2a). We assume that it is possible to measure the coordinates of the points A_i, B_i . The geometrical errors, which will be considered, are measured from the deviation of the points A_i relative to the $O_0 x_0$ axes and the deviation of the points B_i relative to the $O_0 y_0$ axis (Fig. 2a).

Let there be a universal joint (Fig. 2b) which, is affected by geometrical errors (manufacturing and assembly). These errors lead to the modification of the position and orientation of the axes (D1) and (D2). We denote with e_{10}, e_{20}, e_{30} the unit vectors of the frame coordinate system. Also, let $e_1 = [e_{1x}, e_{1y}, e_{1z}]^T$ be the unit vector of the D1 axis and be $e_2 = [e_{2x}, e_{2y}, e_{2z}]^T$ the unit vector of the D2 axis respectively. These vectors are defined only for the initial positions, they are constant related to the time and describe the manufacturing and assembly errors.

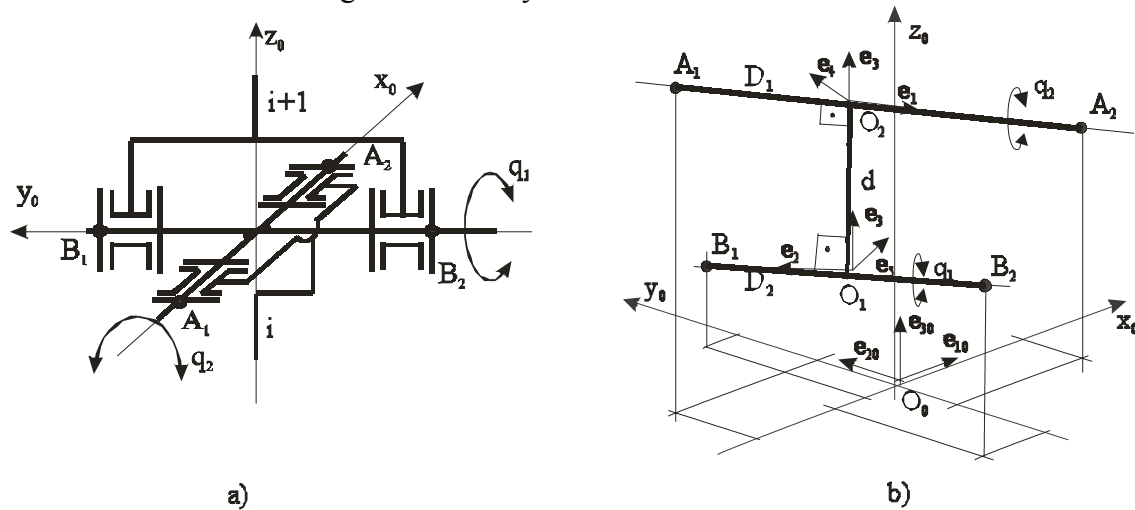


Figure 2. Universal joint without geometrical errors (a) and with errors (b)

Let $e_3 = [e_{3x}, e_{3y}, e_{3z}]$ be a vector which is given by the relation:

$$e_3 = e_1 \times e_2 ; \quad (3)$$

Using all three vectors e_1, e_2 and e_3 it is possible to define the following coordinate systems: system TE1 with e_1, e_2, e_3 as axes and system TE2, with e_1, e_4, e_3 as axes:

$$\begin{aligned} e_5 &= e_2 \times e_3 , \\ e_4 &= e_3 \times e_1 . \end{aligned} \quad (4)$$

The positioning error of the first axis D2 (the relative position between T0 and TE1) can be characterized by the matrix:

$$\mathbf{E}_1 = \begin{bmatrix} \mathbf{e}_{10} \cdot \mathbf{e}_5 & \mathbf{e}_{10} \cdot \mathbf{e}_2 & \mathbf{e}_{10} \cdot \mathbf{e}_3 & \mathbf{x}_{O_1} \\ \mathbf{e}_{20} \cdot \mathbf{e}_5 & \mathbf{e}_{20} \cdot \mathbf{e}_2 & \mathbf{e}_{20} \cdot \mathbf{e}_3 & \mathbf{y}_{O_1} \\ \mathbf{e}_{30} \cdot \mathbf{e}_5 & \mathbf{e}_{30} \cdot \mathbf{e}_2 & \mathbf{e}_{30} \cdot \mathbf{e}_3 & \mathbf{z}_{O_1} \\ 0 & 0 & 0 & 1 \end{bmatrix}. \quad (5)$$

Similarly the matrix, which describes the error of the second axis D1, as the transformation between TE1 and TE2, which in general are not identical, is given by the relation:

$$\mathbf{E}_2 = \begin{bmatrix} \mathbf{e}_5 \cdot \mathbf{e}_1 & \mathbf{e}_5 \cdot \mathbf{e}_4 & 0 & 0 \\ \mathbf{e}_2 \cdot \mathbf{e}_1 & \mathbf{e}_2 \cdot \mathbf{e}_4 & 0 & 0 \\ 0 & 0 & 1 & \mathbf{d} \\ 0 & 0 & 0 & 1 \end{bmatrix}. \quad (6)$$

where \mathbf{d} is the common normal between D1 and D2.

It results that movement at the level of the universal joint, if the errors are taken in consideration, may be characterized by:

$$\mathbf{H} = \mathbf{E}_1 \cdot \mathbf{A}_1 \cdot \mathbf{E}_2 \cdot \mathbf{A}_2, \quad (7)$$

where \mathbf{A}_i are the relative transformation matrix.

The errors for a spherical and prismatic joint may be modeled similarly.

4. ERROR COMPENSATION

General algorithms used to solve direct kinematics in the case of parallel mechanisms consider that for each independent loop of the mechanism one vector equation can be write. Simulating the overall kinematics according to a given path of the TCP (Tools Center Point), the generated program is able to once calculate the undisturbed inverse kinematics and on the other hand the error related variables of the driving joints. Let \mathbf{y} and \mathbf{q} be the coordinates of TCP and actuated joints, respectively. Then :

$$\mathbf{q} = \mathbf{q}(\mathbf{y}) \quad (8)$$

is generally easy to determine for parallel kinematics machines.

With:

$$\dot{\mathbf{q}} = \mathbf{J}(\mathbf{y}) \dot{\mathbf{y}} \quad (9)$$

where \mathbf{J} as the Jacobian matrix is generated automatically.

Small deflections allow the inverse transmission of velocities and errors between workspace and parameter space the same.

Given a disturbed kinematics we distinguish between solutions $\mathbf{y}^*(\mathbf{q})$ (error related forward kinematics) and $\mathbf{y}(\mathbf{q})$ (ideal forward kinematics).

Therefore, \mathbf{q}^{∞} needs to be a set of parameters that fulfills:

$$\mathbf{y}^*(\mathbf{q}^{\infty}) = \mathbf{y}^*(\mathbf{q}) \quad (10)$$

With this relation (20) the errors of the machine would be compensated due to control of corrected joint parameters. Starting with condition (20), it results:

$$\mathbf{y}^*(\mathbf{q}) = \mathbf{y}^*(\mathbf{q}) - \ddot{\mathbf{A}}(\mathbf{y}) \quad (11)$$

where $\mathbf{J} = \mathbf{J}^{-1}$, $\Delta \mathbf{y} = \mathbf{J}(\mathbf{q}) \Delta \mathbf{q}$.

Therefore considering small errors there is:

$$\mathbf{y}^*(\mathbf{q}) = \mathbf{y}_0 = \mathbf{y}^*(\mathbf{q}) - \mathbf{J}(\mathbf{q}) \ddot{\mathbf{A}}(\mathbf{q}) \quad (12)$$

On the other hand,

$$\ddot{\mathbf{A}}(\mathbf{q}) = \mathbf{J}^{-1}(\mathbf{y}) \ddot{\mathbf{A}}(\mathbf{y}) = \mathbf{J}^{-1}(\mathbf{y}) \dot{\mathbf{y}}^*(\mathbf{q}) - \mathbf{y}^*(\mathbf{q}) \quad (13)$$

is easily calculated, as in the case of parallel mechanisms $\mathbf{J}^{-1}(\mathbf{y})$ is more or less given by the inverse kinematics. According to the assumption of small deflections $\Delta \mathbf{q}$ and $\Delta \mathbf{y}$ can be neglected for the calculation of \mathbf{J} .

5. SIMULATION RESULTS

This section presents results of simulated errors for HyMaTo1 parallel machine tool. For this mechanism, a mathematical model of errors was implemented and the simulation of the kinematics was also obtained from a simulation program using the in MOBILE software package [5].

Figure 5 shows initial position of HyMaTo1 obtained by a simulation model developed with MOBILE. Also, figure 6 presents an intermediate position during an assumed movement.

6. CONCLUSIONS

The conclusion can be drawn as follows:

- a) based on assumed modules and on relation of the number of degrees of freedom for a mechanism, a topologic synthesis can be done; a new type of machine tools with parallel topology and decoupled movement, for position of TCP and its orientation respectively was praised.
- b) the kinematics of the whole mechanism can be developed on a modular manner, each module based on the kinematics of one leg;
- c) an analytical model of the geometric and assemble errors can be developed and also an algorithm useful for error compensation was presented.

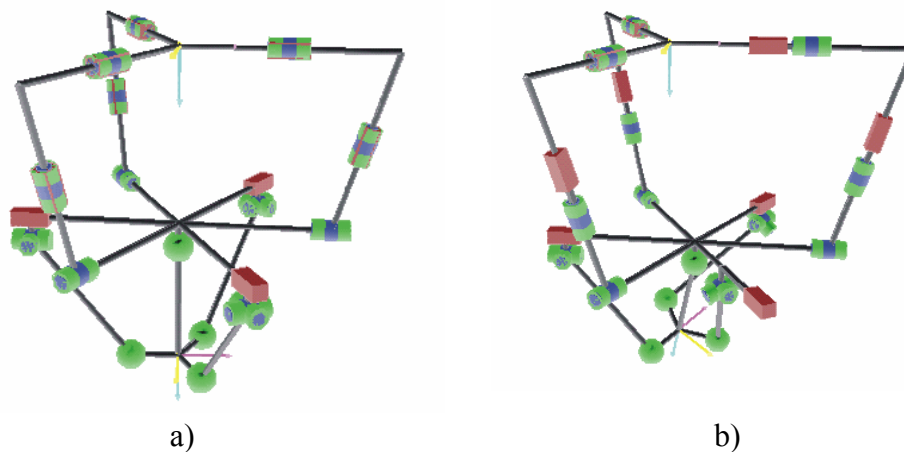


Figure 5. a) Initial position of HyMaTo1. b) Intermediate position of HyMaTo1

7. ACKNOWLEDGMENT

This research was partial financial supported by the Alexander von Humboldt Foundation.

8. REFERENCES

- [1] Angeles, J., (1997), *Fundamentals of Robotic, Mechanical System*, Springer – Verlag.
- [2] Brisan; C., Handra-Luca, V., (2000), *Contributions to the Kinematic Structural Synthesis of the Parallel Robots*, International Conference on PKM, Ann Arbor, Michigan, USA, pp.71-78.
- [3] Brisan, C., Franitza, D. and Hiller, M., (2002), *Modelling and analysis of errors for parallel robots*, Proceedings of Kolloquium of SFB262, Braunschweig, pp.83-96.
- [4] Hiller, M., (1995), *Multiloop Kinematic Chains and Dynamics of Multiloop Systems*, in *Kinematics and Dynamics of Multi-Body Systems* (ed. By J. Angeles and A. Kecskemethy), CISM Courses and Lecture, nr. 360, Springer Verlag.
- [5] Kecskemethy, A., (1994), *MOBILE -User's Guide and Reference Manual*, Gerhard-Mervator-Universität-GH Duisburg.
- [6] PRITSCHOW, G., WURST, K.-H., (1996), *Modular Robots for flexible assembly*. In: Proceedings of the 28th CIRP International Seminar on Manufacturing Systems "Advances in Manufacturing Technology - Focus on Assembly Systems", May 15-17.
- [7] Pritschow, G., Tran, T.L. (1998), *Parallel Kinematics and PC-based Control System for Machine Tools*, Proceedings of 37th IEEE Conference on Decision and Control, Tampa/Florida, USA, pp.2605-2610.
- [8] Song, J., (1999), *Error Modeling and Compensation for Parallel Kinematic Machines*, *Parallel Kinematic Machines: Theoretical Aspects and Industrial Requirements*, pp.171-187.